

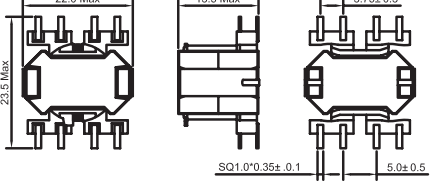


Telecom transformer / 通訊類變壓器

	<p>Core shape:RM-5 & RM-6</p> <p>Features:</p> <ul style="list-style-type: none"> •Low total harmonic distortion •Optimized magnetic shield for low interference •High performance •High-power output •Safety standards approved •RoHS compliance 	<p>磁芯形狀:RM-5 & RM-6</p> <p>特性:</p> <ul style="list-style-type: none"> •總諧波失真小 •產品具有良好的屏蔽性能 •高性能的設計 •輸出功率高 •符合安全標準 •符合RoHS標準
<p>Shape and external dimension / 機械尺寸mm.</p>		
 <p>Figure 1</p>		 <p>Figure 2</p>

Electronical characteristics / 電氣特性

Core shape 磁芯形狀	RM-5	RM-5	RM-6
Center leg area 磁芯中柱面積 Ae mm ²	23.6	23.6	34.07
Length of magnetic circuit 磁路長度 Le mm	18.1	18.1	30.92
Volume 體積 Ve mm ³	23.3	23.3	1053.4
Bobbin type 骨架類型	Vertical/立式	Vertical/立式	Vertical/立式
Turn ratio 圈數比例	N1:N2:N3=1:1:3	N1:N2:N3:N4=1:1:1:1	N1:N2=1:2.5
Inductance 電感量 10KHz/0.1V N1	2.5mH Min.	1.0H Min.	3.6mH Min.
DC Resistance 直流阻抗(Ω)Max. N1	6.5	30.0	4.5
Drawing No.圖紙號	Figure 1	Figure 1	Figure 2